

Super-mini Two-wire Signal Conditioners T-UNIT

SIGNAL TRANSMITTER


(isolated)

Functions & Features

- Converting a DC input into an isolated 4 - 20 mA DC signal
- Monitor terminals
- High-density mounting

Typical Applications

- mV, voltage and current scaling



MODEL: TVS-[1]

ORDERING INFORMATION

- Code number: TVS-[1]
- Specify a code from below for [1]
(e.g. TVS-6)
- Special input range (For code 0)

[1] INPUT

Voltage

- 1: 0 - 10 mV DC (Input resistance 10 kΩ min.)
 - 2: 0 - 100 mV DC (Input resistance 100 kΩ min.)
 - 3: 0 - 1 V DC (Input resistance 1 MΩ min.)
 - 4: 0 - 10 V DC (Input resistance 1 MΩ min.)
 - 5: 0 - 5 V DC (Input resistance 1 MΩ min.)
 - 6: 1 - 5 V DC (Input resistance 1 MΩ min.)
- 0: Specify voltage (0 % or 50 % input must be equal to 0 V.)

GENERAL SPECIFICATIONS

Construction: Stand-alone; terminal access at the front

Connection: Euro terminal

Housing material: Flame-resistant resin (black)

Isolation: Input to output

Zero adjustment: -5 to +5 % (front)

Span adjustment: 95 to 105 % (front)

INPUT SPECIFICATIONS

Input: -300 - +300 V DC

Minimum span: 10 mV

Input resistance

(Input Span: Input Resistance)

10 - 100 mV: $\geq 10 \text{ k}\Omega$

0.1 - 1 V: $\geq 100 \text{ k}\Omega$

$\geq 1 \text{ V}$: $\geq 1 \text{ M}\Omega$


OUTPUT SPECIFICATIONS

Output: 4 - 20 mA DC

Load resistance vs. supply voltage:

Load Resistance (Ω) = (Supply Voltage (V) - 12 (V)) \div (0.02 (A))

(including leadwire resistance)



INSTALLATION

Supply voltage: 12 - 28 V DC

Operating temperature: -5 to +60°C (23 to 140°F)

Operating humidity: 30 to 90 %RH (non-condensing)

Mounting: Surface or DIN rail

Weight: 120 g (0.26 lbs)

PERFORMANCE in percentage of span

Accuracy: $\pm 0.1 \%$


Temp. coefficient: $\pm 0.015 \%/^{\circ}\text{C}$ ($\pm 0.008 \%/^{\circ}\text{F}$)

Response time: $\leq 0.5 \text{ sec.}$ (0 - 90 %)

Insulation resistance: $\geq 100 \text{ M}\Omega$ with 500 V DC


Dielectric strength: 500 V AC @ 1 minute (input to output)

EXTERNAL DIMENSIONS & TERMINAL ASSIGNMENTS unit: mm (inch)

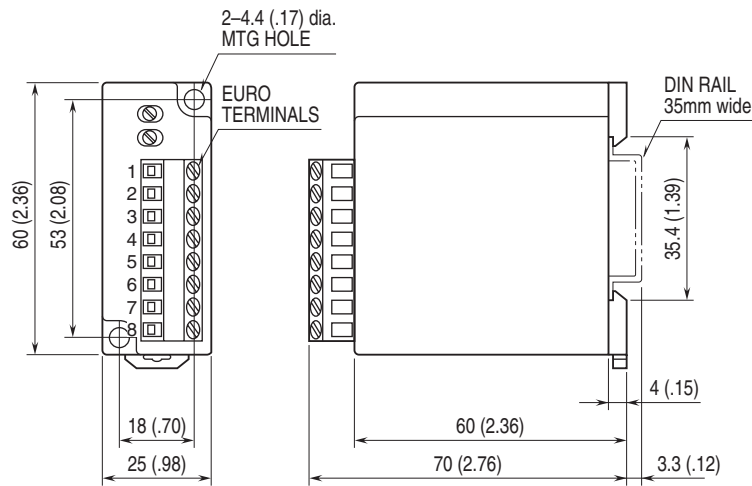

•When mounting, no extra space is needed between units.

SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

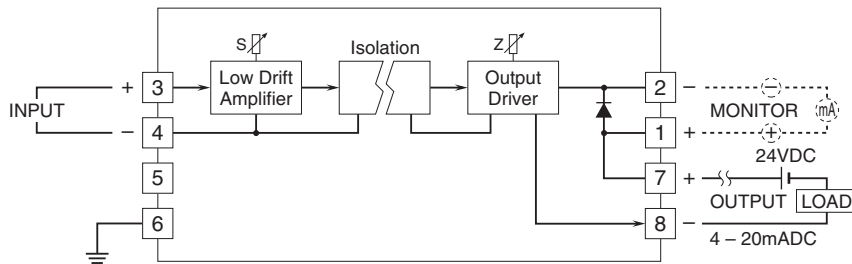

Specifications are subject to change without notice.